



tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



TW 100

HIGH PRESSURE TRIPLEX PUMP



Technical Features

Max pressure / pression maximale / maximaler Druck	40 MPa	400 bar	5800 psi
Max flow rate / débit maximale / maximale Durchflussrate	285 lt/min	75 gpm	
Piston diameter / diamètre du piston / Kolbendurchmesser	From 2"1/4 (57,2 mm) to 4" (101,6 mm)		
Stroke / Course / Hubweg	4" – 101,6 mm		
Maximum stroke rate / coup par minute / max Hub pro Minute	160 / min	160 spm	
Suction diameter / diamètre d'aspiration / Saugdurchmesser	3"	76,2 mm	
Output diameter / diamètre de sortie / Ausgangsdurchmesser	1"	25,4 mm	


7" Control panel lcd monitor

Bareshaft dimensions and weight

Width 615 mm - 2'	Height 450 mm - 1'5"	Lenght 1100 mm - 3'7"	Weight 1000 Kg - 2200 lb
-------------------	----------------------	-----------------------	--------------------------

Frame dimensions and weight

Width 2438 mm - 7'12"	Lenght 5460 mm - 17'11"	Height 2591 mm - 8'6"	Weight 5500 Kg - 12125 lb
-----------------------	-------------------------	-----------------------	---------------------------

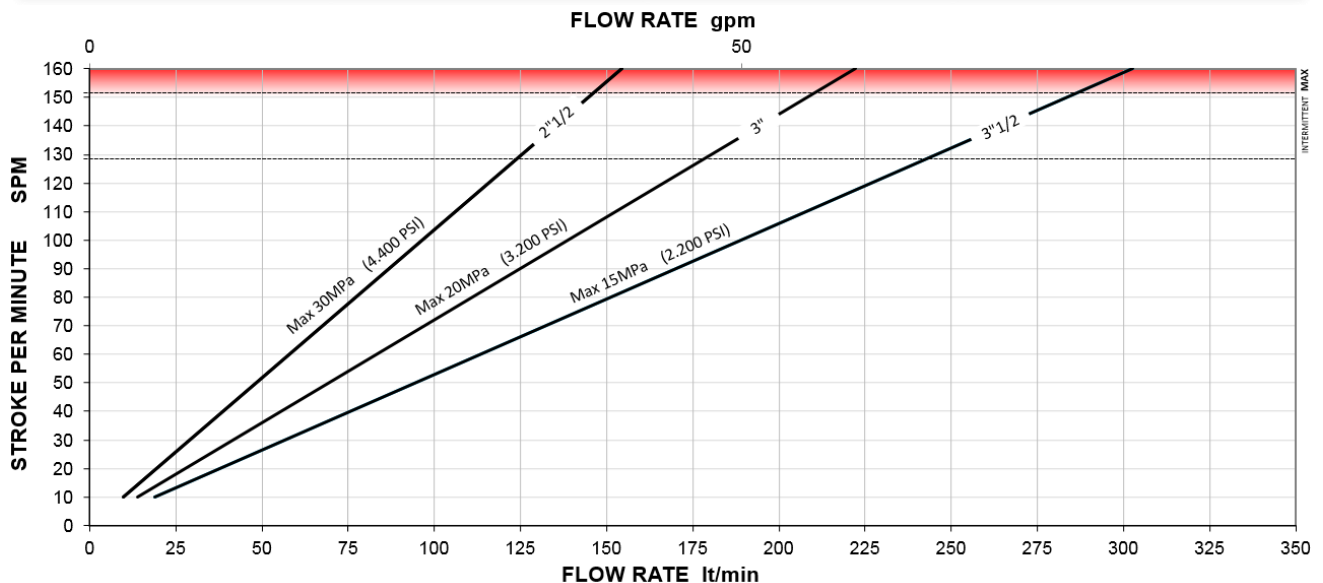

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice