



tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



TW 250/E

HIGH FLOW ELECTRIC TRIPLEX PUMP



Technical Features

Max power input / puissance max / maximale Kraft	315 kW	428 HP	
Max pressure / pression maximale / maximaler Druck	11 MPa	110 bar	1595 psi
Max flow rate / débit maximale / maximale Durchflussrate	2600 lt/min	686 gpm	
Piston diameter / diamètre du piston / Kolbendurchmesser	From 5"1/2 (139,7mm) to 7"1/2 (190,5 mm)		
Stroke / Course / Hubweg	5,5" – 139,7 mm		
Maximum stroke rate / coup par minute / max Hub pro Minute	240 / min	240 spm	
Suction diameter / diamètre d'aspiration / Saugdurchmesser	6"	152,4 mm	
Output diameter / diamètre de sortie / Ausgangsdurchmesser	4"	101,6 mm	


7" Control panel lcd monitor

Bareshaft dimensions and weight

Width 1500 mm - 4'11"	Height 890 mm - 2'11"	Lenght 1950 mm - 6'5"	Weight 3600 Kg - 7936 lb
-----------------------	-----------------------	-----------------------	--------------------------

Frame dimensions and weight

Width 2400 mm - 7'10"	Lenght 4800 mm - 15'9"	Height 2400 mm - 7'10'	Weight 9200 Kg - 20280 lb
-----------------------	------------------------	------------------------	---------------------------

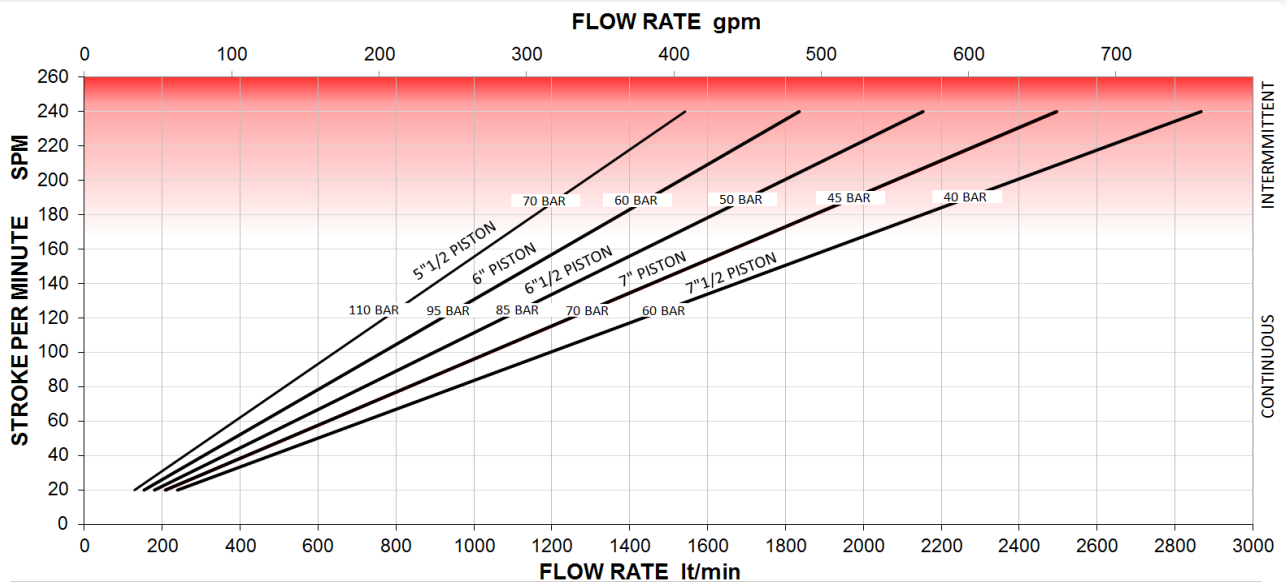

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice